

Plastic square shape photoelectric sensors PSE series



Features

- Universal housing, an ideal replacement for a wide range of sensor types;
- IP67, suitable for harsh environments;
- One-click distance setting, accurate and fast;




Model

NPN NO/NC	PSE-BC100DNB-E3	PNP NO/NC	PSE-BC100DPB-E3
-----------	-----------------	-----------	-----------------


Specifications

Detection type	Diffuse reflection	Indicator	Green light: power, stable signal (unstable signal flash)
Sensing distance	100cm		Yellow light: output, overload or short circuit (flash)
Output	NPN NO/NC or PNP NO/NC	Anti-ambient light	Anti-sunlight interference $\leq 10,000\text{lux}$;
Response time	$\leq 1\text{ms}$		Incandescent light interference $\leq 3,000\text{lux}$
Supply voltage	10...30 VDC	Operating temperature	$-25^{\circ}\text{C}...55^{\circ}\text{C}$
Consumption current	$\leq 25\text{mA}$	Storage temperature	$-25^{\circ}\text{C}...70^{\circ}\text{C}$
Load current	$\leq 200\text{mA}$	Protection degree	IP67
Hysteresis range	3...20%	Production standard	EN60947-5-2:2012, IEC60947-5-2:2012
Voltage drop	$\leq 1\text{V}$	Material	Housing: PC+ABS; Filter: PMMA
Light source	Infrared (860nm)	Weight	10g
Protection circuit	Short-circuit, overload, reverse polarity and	Connection	M8 connector
	zener protection		
NO/NC adjustment	Press the button for 5...8s, when the yellow and green light flash synchronously at 2Hz, and lift. Finish state switch.		
Distance adjustment	Press the button for 2...5s, when the yellow and green light flash synchronously at 4Hz, and lift to finish the distance setting.		
	If the yellow and green light flash asynchronously @8Hz for 3s, setting fails and the product distance goes to the maximum.		


Dimensions

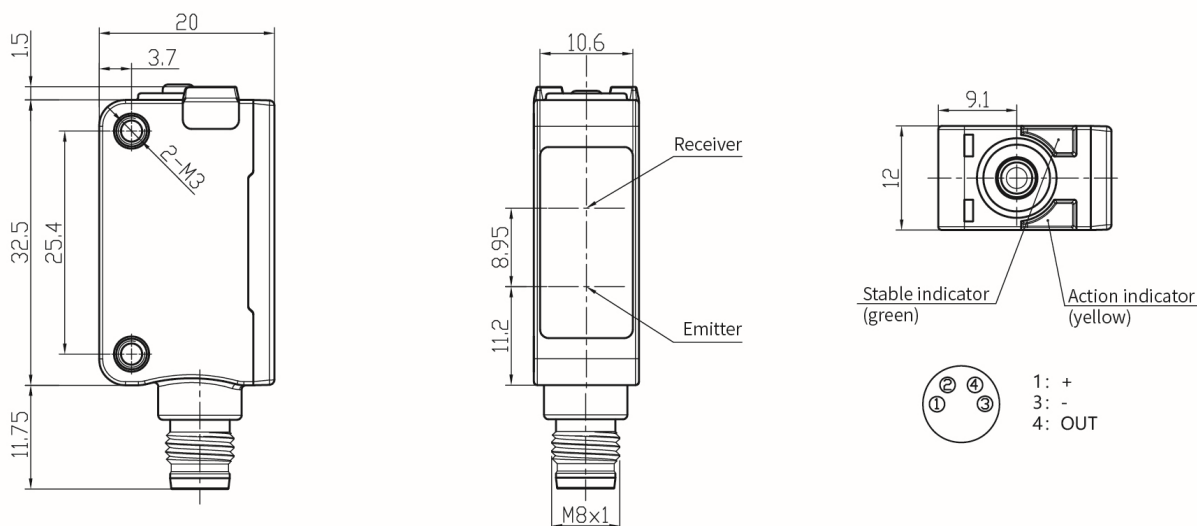

Circuit Diagrams

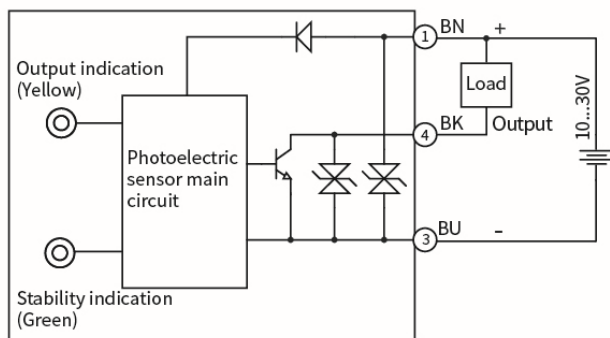

NPN

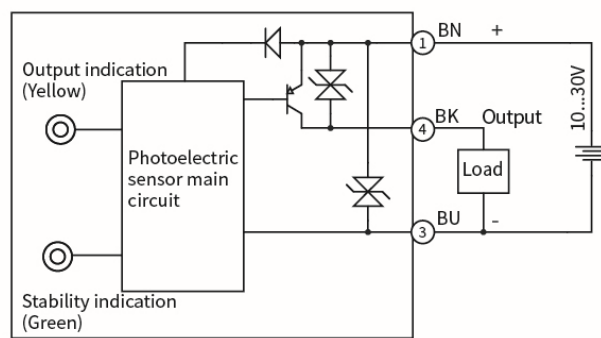

PNP